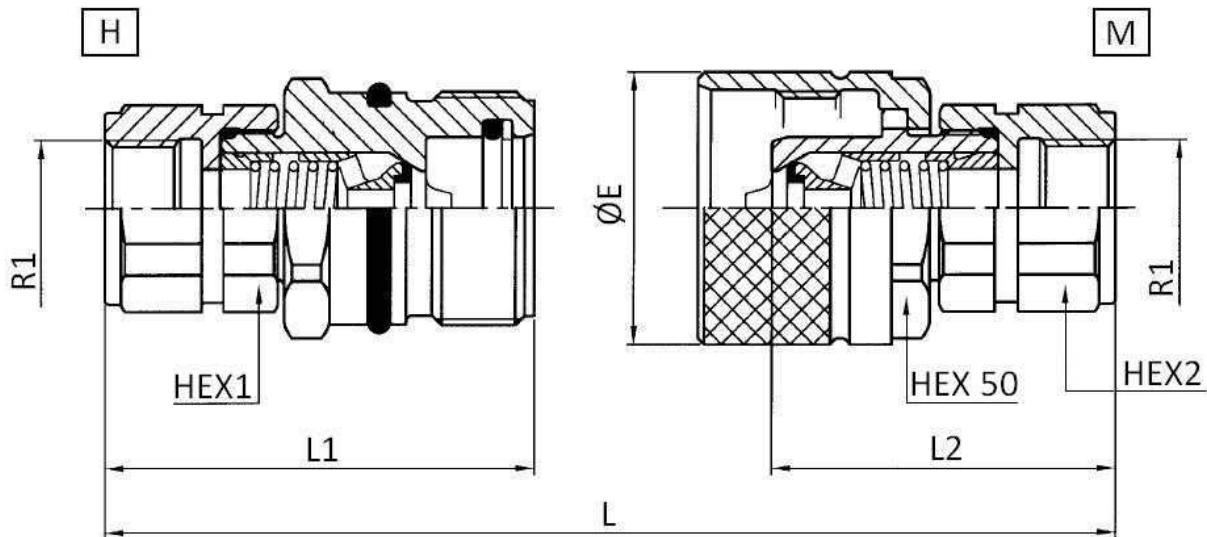


**Material:** Acero**Juntas:** NBR**Temperatura de trabajo:** -25°C / +100°C**Presión de trabajo:** 250-350 bar**Conexión en presión:** Permitida (lado macho o lado hembra)**Máxima presión residual:** Presión de trabajo

Artículo	DN	R1	Presión de trabajo (bar)	Enchufe	CAUDA L (l/min)	CAUDAL MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØE
A800804	10	1/4" BSP	325	M	23	46	98,3		61,2		22	34
A800806	10	3/8" BSP	325	M	23	46	98,3		61,2		22	34
A800808	13	1/2" BSP	300	M	45	90	103,5		64,5		30	42
A800812	20	3/4" BSP	250	M	106	190	132,5		78,5		36	47,5
A800816	25	1" BSP	250	M	189	280	152,5		87,5		41	55
A800904	10	1/4" BSP	325	H	23	46	98,3	64		22		
A800906	10	3/8" BSP	325	H	23	46	98,3	64		22		
A800908	13	1/2" BSP	300	H	45	90	103,5	67		30		
A800912	20	3/4" BSP	250	H	106	190	132,5	85,5		36		
A800916	25	1" BSP	250	H	189	280	152,5	100		41		